

RUSH+ SMALL

bolle
SAFETY



FRAME

- + UPPER PROTECTION
- + ADAPTED TO NARROW FACES
- + SINGLE-LENS FRAME



TEMPLES

- + BI-MATERIAL TEMPLES FOR MORE COMFORT
- + FOAM AND STRAP KIT (OPTION)

LENS

- + PLATINUM® ASAF COATING
- + PANORAMIC FIELD OF VISION

VERSIONS



CLEAR
#PSSRUSP0652B



SMOKE
#PSSRUSP4442B



CSP
#PSSRUSPC142B



STRAP & FOAM
#RUSHKITFS



26 g

+ MICROFIBER POUCH INCLUDED

DESCRIPTION

The wraparound RUSH+ Small was specifically designed for narrow faces. Light and with a wide field of view, this model offers a perfect optical quality and unique comfort in all situations.


PLATINUM® (+P) ASAF Coating

Permanent coating on both sides of the lens gives them a high resistance to scratching, and delays the onset of fogging. Certified K & N (EN166) PLATINUM® resists to the most aggressive chemicals.

CSP

This innovating coating is an effective solution for all activities that alternate exposure to bright light and low light, while also being suitable for extreme hot and cold temperature environments.

TECHNOLOGIES

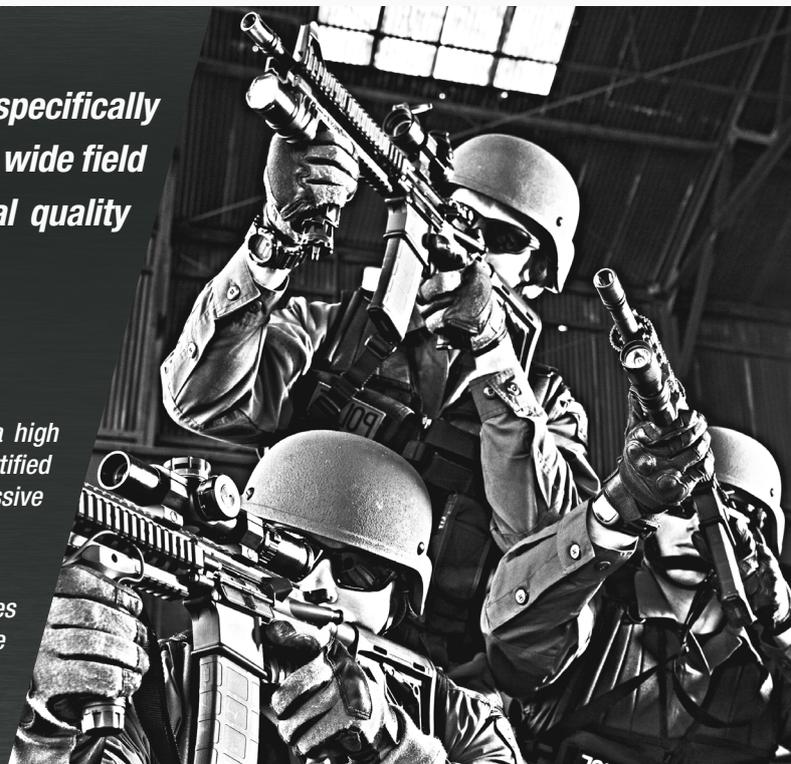

RUSH+ SMALL

bolle
SAFETY



MODEL	FRAME	VERSIONS	REFERENCES	LENS MARKINGS	FRAME MARKINGS	V50 BALLISTIC RESISTANCE STANAG 2920	ANSI/MIL	COATING
RUSH+ SMALL	■ Black	● Clear	PSSRUSP0652B	2C-1.2 ☞ 1 FT KN C€	☞ EN166 FT C€	799.2 km/h - 222.9 m/s	ANSI Z87.1 MIL-PRF-32432A	ASAF ☞
	■ Black	● Smoke	PSSRUSP4442B	5-3.1 ☞ 1 FT KN C€	☞ EN166 FT C€	828 km/h - 230.4 m/s	ANSI Z87.1 MIL-PRF-32432A	ASAF ☞
	■ Black	● CSP	PSSRUSPC142B	5-1.4 ☞ 1 FT KN C€	☞ EN166 FT C€	763.2 km/h - 212.2 m/s	ANSI Z87.1 MIL-PRF-32432A	ASAF ☞
	Foam & Strap Kit	-	RUSHKITFS	-	-	-	-	-

Lens markings

Optical class symbols:

1. Continuous work

Mechanical strength symbols:

F. Low energy impact, resists a 6 mm, 0.86 g ball at 45 m/s

T. The letter T, immediately after the mechanical strength symbol, authorises use for high speed particles at extreme temperatures.

Others symbols:

K. Resistance to surface damage by fine particles

N. Resistance to fogging

C€ European standard ☞ Manufacturer name

Frame markings

Standards :

EN166. guaranteed minimum resistance of the protective eyewear against everyday risks including dropping the protective eyewear onto the ground, ageing by light exposure, exposure to heat or corrosion etc.

Mechanical strength symbols:

F. Low energy impact, resists a 6 mm, 0.86 g ball at 45 m/s

T. The letter T, immediately after the mechanical strength symbol, authorises use for high speed particles at extreme temperatures.

Others symbols:

C€ European standard ☞ Manufacturer name

Bollé Safety product approval certificates to CE standards will be sent on request.

	PSSRUSP0652B	PSSRUSP4442B	PSSRUSPC142B	RUSHKITFS
EAN13 Unit pack	3 660 740 012 489	3 660 740 012 496	3 660 740 012 502	3660740006488
EAN13 Inner pack (number of unit per inner pack)	-	-	-	3660740106485 (20 units)
EAN13 Carton (number of unit per master pack)	3 660 740 212 483 (125 units)	3 660 740 212 490 (125 units)	3 660 740 212 506 (125 units)	3660740206482 (240 units)

*Maintenance: Pitted, scratched or damaged lenses must be replaced by replacing the complete product. If the frame is damaged also replace the complete product. After each use it is recommended to keep the spectacles or goggles in a microfiber pouch or rigid case.
Storage: All products must be stored in a dry and clean environment.*

RUSH+ SMALL	
Lens	PC - 2. mm - Curve 9
Temples	PC + TPR
Strap	Nylon - 15mm
Foam	SBR + Nylon
Spare lens	No
Country of Origin	Taiwan



For more information on this product and the BSSI range, visit:

www.bollesafety-si.com

BOLLÉ SAFETY

34 rue de la Soie

69100, Villeurbanne

FRANCE

